

### **Caring for the wood:**

With proper care, the wooden enclosure will last a lifetime. To ensure it stays in perfect condition, do not place near any heat source or on top of any hot equipment. Avoid leaving in direct sunlight, or in excessively dry or humid environments for long periods of time.

---

### **Warranty:**

The Domino Phono Preamp is covered by a two year limited warranty for materials and workmanship. For more details, please visit [www.tisburyaudio.co.uk/terms](http://www.tisburyaudio.co.uk/terms)

---

### **Contact:**


Enquiries: [info@tisburyaudio.co.uk](mailto:info@tisburyaudio.co.uk)

Website: [www.tisburyaudio.co.uk](http://www.tisburyaudio.co.uk)

Address: Tisbury Audio  
G21 Olympic House  
12 Somerford Grove  
London  
N16 7RZ  
United Kingdom



**TISBURY AUDIO**  
DOMINO PHONO PREAMP

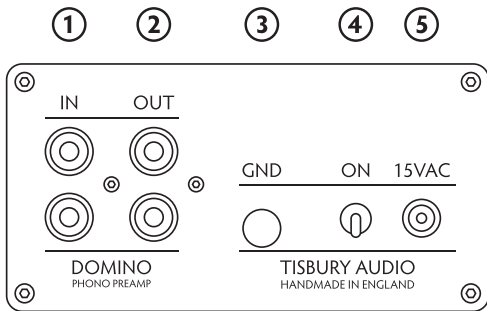

1. MM/MC Input
2. Output
3. Turntable Ground
4. Power Switch
5. 15 VAC @ 500 mA. Only use power supply provided.

<b>THD, 1 kHz:</b>	0.0005%, 1 V out
<b>Noise, 40 dB gain:</b>	-91 dBV, A-weighted
<b>Crosstalk, 1 kHz:</b>	-103 dB, 40 dB gain
<b>Input Capacitance:</b>	220 pF
<b>Overload Margin:</b>	>30 dB
<b>RIAA Accuracy:</b>	<0.2 dB 20 Hz - 20 kHz

**Gain Sensitivity:** (Set by switches on base)

**40 dB:** 3.0 mV for 300 mV output

**49 dB:** 1.1 mV for 300 mV output

**58 dB:** 0.4 mV for 300 mV output

**67 dB:** 0.1 mV for 300 mV output

**Input Impedance:** (Set by switches on base)

**47 Ohms:** For MC cartridges

**47 kOhms:** For MM cartridges

**CAUTION:** When turning your system on or off, or when changing gain settings on Domino, you must ALWAYS follow the procedure below. Failing to do so may cause very loud and potentially damaging popping noises through your system.

**Power On:** Turn Domino on FIRST, turn power amplifier on LAST.

**Power Off:** Turn power amplifier off FIRST, turn Domino off LAST.

**Changing Domino's Gain Settings:** Power whole system off as above, change gain settings, power system on as above.